

1.67二重焦点レンズ

■ 特注範囲

■ エグゼ-B45 ハードマルチ<CSコート>


C(-)	球面	T C (-)				
		0	1	2	3	4
S(-)	(-)	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0
0.00		5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0
.25						
.50						
.75						
1.00						
.25						
.50						
.75						
2.00						
.25						
.50						
.75						
3.00						
.25						
.50						
.75						
4.00						
.25						
.50						
.75						
5.00						
.25						
.50						
.75						
6.00						

C(+)	球面	T C (+)				
		0	1	2	3	4
S(+)	(+)	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0
0.00		5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0
.25						
.50						
.75						
1.00						
.25						
.50						
.75						
2.00						
.25						
.50						
.75						
3.00						
.25						
.50						
.75						
4.00						
.25						
.50						
.75						
5.00						
.25						
.50						
.75						
6.00						

混合乱視						
C(-)	球面	T C (-)				
		0	1	2	3	4
S(+)	(+)	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0	2 5 7 0
0.25		5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0	5 0 5 0
.50						
.75						
1.00						
.25						
.50						
.75						
2.00						
.25						
.50						
.75						
3.00						
.25						
.50						
.75						

加入度 1.50 ~ 3.50 (0.25とび)

注 インセット指定はお受け出来ません。

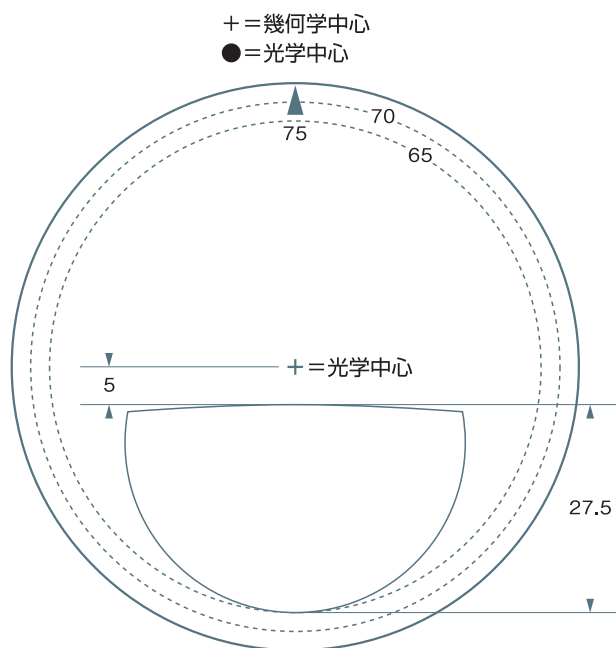

仕 様	屈 折 率	1.67
	ア ッ ペ 数	32.0
	比 重	1.35
エグゼ-B45		

特殊加工	ブ リ ズ ム	○	3△まで (-) C+S=3.00 (+) C+S=3.00
	外 径 指 定	○	60 ~ 75 (1mm単位)
	コ バ 厚 ・ 中 心 厚	○	コバ厚のみ
	U V 加 工	●	UV練り込み
	プ ラ イ マ ー 加 工	-	
	C S コ ー ト	●	標準仕様
	C Z コ ー ト	-	
	C Z C F コ ー ト	-	
	シ ェ イ プ 加 工	-	
	F E T S 加 工	-	